


# CR

## チャッキングリーマ

Chucking reamers

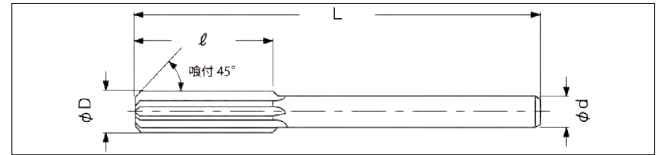

材質：HSS

刃径	刃長	全長	柄径	刃数
D	ℓ	L	d	N
1.95	20	80	1.8	4
1.96	20	80	1.8	4
1.97	20	80	1.8	4
1.98	20	80	1.8	4
1.99	20	80	1.8	4
2.0	20	80	1.8	4
2.01	20	80	1.8	4
2.02	20	80	1.8	4
2.03	20	80	1.8	4
2.04	20	80	1.8	4
2.05	20	80	1.8	4
2.06	20	80	1.8	4
2.07	20	80	1.8	4
2.08	20	80	1.8	4
2.09	20	80	1.8	4
2.1	20	80	1.8	4
2.2	25	90	2.0	4
2.3	25	90	2.0	4
2.4	25	90	2.2	4
2.5	25	90	2.2	4
2.6	25	90	2.2	4
2.7	30	110	2.5	6
2.8	30	110	2.5	6
2.9	30	110	2.5	6
2.95	30	110	2.5	6
2.96	30	110	2.5	6
2.97	30	110	2.5	6
2.98	30	110	2.5	6
2.99	30	110	2.5	6
3.0	30	110	2.5	6
3.01	30	110	2.5	6
3.02	30	110	2.5	6
3.03	30	110	2.5	6
3.04	30	110	2.5	6
3.05	30	110	2.5	6
3.06	30	110	2.5	6
3.07	30	110	2.5	6
3.08	30	110	2.5	6
3.09	30	110	2.5	6
3.1	30	110	2.5	6
3.2	30	110	2.8	6
3.3	30	110	2.8	6
3.4	30	110	2.8	6
3.5	30	110	2.8	6
3.6	30	110	2.8	6
3.7	30	110	3.5	6
3.8	30	110	3.5	6
3.9	30	110	3.5	6
3.95	30	110	3.5	6
3.96	30	110	3.5	6
3.97	30	110	3.5	6
3.98	30	110	3.5	6
3.99	30	110	3.5	6
4.0	30	110	3.5	6
4.01	30	110	3.5	6

刃径	刃長	全長	柄径	刃数
D	ℓ	L	d	N
4.02	30	110	3.5	6
4.03	30	110	3.5	6
4.04	30	110	3.5	6
4.05	30	110	3.5	6
4.06	30	110	3.5	6
4.07	30	110	3.5	6
4.08	30	110	3.5	6
4.09	30	110	3.5	6
4.1	30	110	3.5	6
4.2	30	120	3.5	6
4.3	30	120	3.5	6
4.4	30	120	3.5	6
4.5	30	120	3.5	6
4.6	30	120	3.5	6
4.7	30	120	4.0	6
4.8	30	120	4.0	6
4.9	30	120	4.0	6
4.95	30	120	4.0	6
4.96	30	120	4.0	6
4.97	30	120	4.0	6
4.98	30	120	4.0	6
4.99	30	120	4.0	6
5.0	30	120	4.0	6
5.01	30	120	4.0	6
5.02	30	120	4.0	6
5.03	30	120	4.0	6
5.04	30	120	4.0	6
5.05	30	120	4.0	6
5.06	30	120	4.0	6
5.07	30	120	4.0	6
5.08	30	120	4.0	6
5.09	30	120	4.0	6
5.1	30	120	4.0	6
5.2	30	120	4.5	6
5.3	30	120	4.5	6
5.4	30	120	4.5	6
5.5	30	120	4.5	6
5.6	30	120	4.5	6
5.7	30	130	5.0	6
5.8	30	130	5.0	6
5.9	30	130	5.0	6
5.95	30	130	5.0	6
5.96	30	130	5.0	6
5.97	30	130	5.0	6
5.98	30	130	5.0	6
5.99	30	130	5.0	6
6.0	30	130	5.0	6
6.01	30	130	5.0	6
6.02	30	130	5.0	6
6.03	30	130	5.0	6
6.04	30	130	5.0	6
6.05	30	130	5.0	6
6.06	30	130	5.0	6
6.07	30	130	5.0	6
6.08	30	130	5.0	6


ハイスリーマ

NEXT >

CR

チャッキングリーマ

Chucking reamers

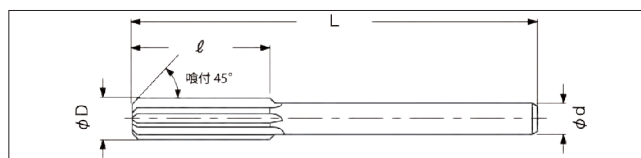

材質：HSS

刃径	刃長	全長	柄径	刃数
D	ℓ	L	d	N
6.09	30	130	5.0	6
6.1	30	130	5.0	6
6.2	35	130	5.0	6
6.3	35	130	5.0	6
6.4	35	130	5.0	6
6.5	35	130	5.0	6
6.6	35	130	5.0	6
6.7	35	140	6.0	6
6.8	35	140	6.0	6
6.9	35	140	6.0	6
6.95	35	140	6.0	6
6.96	35	140	6.0	6
6.97	35	140	6.0	6
6.98	35	140	6.0	6
6.99	35	140	6.0	6
7.0	35	140	6.0	6
7.01	35	140	6.0	6
7.02	35	140	6.0	6
7.03	35	140	6.0	6
7.04	35	140	6.0	6
7.05	35	140	6.0	6
7.06	35	140	6.0	6
7.07	35	140	6.0	6
7.08	35	140	6.0	6
7.09	35	140	6.0	6
7.1	35	140	6.0	6
7.2	35	140	6.0	6
7.3	35	140	6.0	6
7.4	35	140	6.0	6
7.5	35	140	6.0	6
7.6	35	140	6.0	6
7.7	40	150	6.0	6
7.8	40	150	6.0	6
7.9	40	150	6.0	6
7.95	40	150	6.0	6
7.96	40	150	6.0	6
7.97	40	150	6.0	6
7.98	40	150	6.0	6
7.99	40	150	6.0	6
8.0	40	150	6.0	6
8.01	40	150	6.0	6
8.02	40	150	6.0	6
8.03	40	150	6.0	6
8.04	40	150	6.0	6
8.05	40	150	6.0	6
8.06	40	150	6.0	6
8.07	40	150	6.0	6
8.08	40	150	6.0	6
8.09	40	150	6.0	6
8.1	40	150	6.0	6
8.2	40	150	7.0	6
8.3	40	150	7.0	6
8.4	40	150	7.0	6
8.5	40	150	7.0	6
8.6	40	150	7.0	6

刃径	刃長	全長	柄径	刃数
D	ℓ	L	d	N
8.7	40	160	7.0	6
8.8	40	160	7.0	6
8.9	40	160	7.0	6
8.95	40	160	7.0	6
8.96	40	160	7.0	6
8.97	40	160	7.0	6
8.98	40	160	7.0	6
8.99	40	160	7.0	6
9.0	40	160	7.0	6
9.01	40	160	7.0	6
9.02	40	160	7.0	6
9.03	40	160	7.0	6
9.04	40	160	7.0	6
9.05	40	160	7.0	6
9.06	40	160	7.0	6
9.07	40	160	7.0	6
9.08	40	160	7.0	6
9.09	40	160	7.0	6
9.1	40	160	7.0	6
9.2	40	160	7.0	6
9.3	40	160	7.0	6
9.4	40	160	7.0	6
9.5	40	160	7.0	6
9.6	40	160	7.0	6
9.7	40	160	8.0	6
9.8	40	160	8.0	6
9.9	40	160	8.0	6
9.95	40	160	8.0	6
9.96	40	160	8.0	6
9.97	40	160	8.0	6
9.98	40	160	8.0	6
9.99	40	160	8.0	6
10.0	40	160	8.0	6
10.01	40	160	8.0	6
10.02	40	160	8.0	6
10.03	40	160	8.0	6
10.04	40	160	8.0	6
10.05	40	160	8.0	6
10.06	40	160	8.0	6
10.07	40	160	8.0	6
10.08	40	160	8.0	6
10.09	40	160	8.0	6
10.1	40	160	8.0	6
10.2	40	160	8.0	6
10.3	40	160	8.0	6
10.4	40	160	8.0	6
10.5	40	160	8.0	6
10.6	40	160	8.0	6
10.7	45	170	8.0	6
10.8	45	170	8.0	6
10.9	45	170	8.0	6
10.95	45	170	8.0	6
10.96	45	170	8.0	6
10.97	45	170	8.0	6
10.98	45	170	8.0	6


◀ FROM

NEXT ▶

# CR

## チャッキングリーマ

Chucking reamers

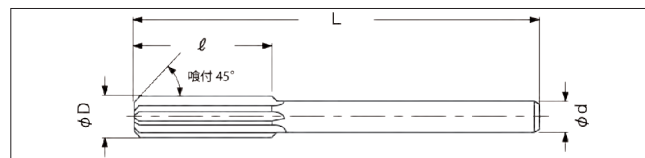

材質：HSS

刃径	刃長	全長	柄径	刃数
D	ℓ	L	d	N
10.99	45	170	8.0	6
11.0	45	170	8.0	6
11.01	45	170	8.0	6
11.02	45	170	8.0	6
11.03	45	170	8.0	6
11.04	45	170	8.0	6
11.05	45	170	8.0	6
11.06	45	170	8.0	6
11.07	45	170	8.0	6
11.08	45	170	8.0	6
11.09	45	170	8.0	6
11.1	45	170	8.0	6
11.2	45	170	9.0	6
11.3	45	170	9.0	6
11.4	45	170	9.0	6
11.5	45	170	9.0	6
11.6	45	170	9.0	6
11.7	45	170	9.0	6
11.8	45	170	9.0	6
11.9	45	170	9.0	6
11.95	45	170	9.0	6
11.96	45	170	9.0	6
11.97	45	170	9.0	6
11.98	45	170	9.0	6
11.99	45	170	9.0	6
12.0	45	170	9.0	6
12.01	45	170	9.0	6
12.02	45	170	9.0	6
12.03	45	170	9.0	6
12.04	45	170	9.0	6
12.05	45	170	9.0	6
12.06	45	170	9.0	6
12.07	45	170	9.0	6
12.08	45	170	9.0	6
12.09	45	170	9.0	6
12.1	45	170	9.0	6
12.2	45	180	9.0	6
12.3	45	180	9.0	6
12.4	45	180	9.0	6
12.5	45	180	9.0	8
12.6	45	180	9.0	8
12.7	45	180	10.0	8
12.8	45	180	10.0	8
12.9	45	180	10.0	8
12.95	45	180	10.0	8
12.96	45	180	10.0	8
12.97	45	180	10.0	8
12.98	45	180	10.0	8
12.99	45	180	10.0	8
13.0	45	180	10.0	8
13.01	45	180	10.0	8
13.02	45	180	10.0	8
13.03	45	180	10.0	8
13.04	45	180	10.0	8
13.05	45	180	10.0	8

刃径	刃長	全長	柄径	刃数
D	ℓ	L	d	N
13.06	45	180	10.0	8
13.07	45	180	10.0	8
13.08	45	180	10.0	8
13.09	45	180	10.0	8
13.1	45	180	10.0	8
13.2	45	180	10.0	8
13.3	45	180	10.0	8
13.4	45	180	10.0	8
13.5	45	180	10.0	8
13.6	45	180	10.0	8
13.7	45	180	10.0	8
13.8	45	180	10.0	8
13.9	45	180	10.0	8
14.0	50	190	10.0	8
15.0	50	200	11.0	8
16.0	50	200	12.0	8
17.0	55	200	12.0	8
18.0	55	220	14.0	8
19.0	55	220	14.0	8
20.0	60	230	14.0	8

ハイスリーマ