


CRL チャッキングリーマ (ロング柄)

Chucking reamers with long shank

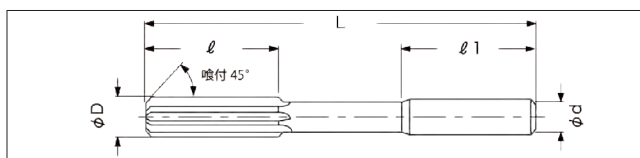

材質：HSS-Co

刃径	刃長	全長	柄長	柄径	刃数
D	ℓ	L	ℓ 1	d	N
3.0	35	165	75	3.0	6
3.1	35	165	75	3.0	6
3.2	35	165	75	3.0	6
3.3	35	165	75	3.0	6
3.4	35	165	75	3.0	6
3.5	35	165	75	3.5	6
3.6	35	165	75	3.5	6
3.7	35	165	75	3.5	6
3.8	35	165	75	3.5	6
3.9	35	165	75	3.5	6
4.0	35	165	75	4.0	6
4.1	35	165	75	4.0	6
4.2	35	165	75	4.0	6
4.3	35	165	75	4.0	6
4.4	35	165	75	4.0	6
4.5	35	165	75	4.5	6
4.6	35	165	75	4.5	6
4.7	35	165	75	4.5	6
4.8	35	165	75	4.5	6
4.9	35	165	75	4.5	6
5.0	35	180	75	5.0	6
5.1	35	180	75	5.0	6
5.2	35	180	75	5.0	6
5.3	35	180	75	5.0	6
5.4	35	180	75	5.0	6
5.5	35	180	75	5.5	6
5.6	35	180	75	5.5	6
5.7	35	180	75	5.5	6
5.8	35	180	75	5.5	6
5.9	35	180	75	5.5	6
6.0	35	195	90	6.0	6
6.1	35	195	90	6.0	6
6.2	35	195	90	6.0	6
6.3	35	195	90	6.0	6
6.4	35	195	90	6.0	6
6.5	35	195	90	6.0	6
6.6	35	195	90	6.0	6
6.7	35	195	90	6.0	6
6.8	35	195	90	6.0	6
6.9	35	195	90	6.0	6
7.0	35	205	90	7.0	6
7.1	35	205	90	7.0	6
7.2	35	205	90	7.0	6
7.3	35	205	90	7.0	6
7.4	35	205	90	7.0	6
7.5	35	205	90	7.0	6
7.6	35	205	90	7.0	6
7.7	35	205	90	7.0	6
7.8	35	205	90	7.0	6
7.9	35	205	90	7.0	6
8.0	40	225	105	8.0	6
8.1	40	225	105	8.0	6
8.2	40	225	105	8.0	6
8.3	40	225	105	8.0	6
8.4	40	225	105	8.0	6


刃径	刃長	全長	柄長	柄径	刃数
D	ℓ	L	ℓ 1	d	N
8.5	40	225	105	8.0	6
8.6	40	225	105	8.0	6
8.7	40	225	105	8.0	6
8.8	40	225	105	8.0	6
8.9	40	225	105	8.0	6
9.0	40	225	105	9.0	6
9.1	40	225	105	9.0	6
9.2	40	225	105	9.0	6
9.3	40	225	105	9.0	6
9.4	40	225	105	9.0	6
9.5	40	225	105	9.0	6
9.6	40	225	105	9.0	6
9.7	40	225	105	9.0	6
9.8	40	225	105	9.0	6
9.9	40	225	105	9.0	6
10.0	40	240	105	10.0	6
10.1	40	240	105	10.0	6
10.2	40	240	105	10.0	6
10.3	40	240	105	10.0	6
10.4	40	240	105	10.0	6
10.5	40	240	105	10.0	6
10.6	40	240	105	10.0	6
10.7	40	240	105	10.0	6
10.8	40	240	105	10.0	6
10.9	40	240	105	10.0	6
11.0	45	240	105	10.0	6
11.1	45	240	105	10.0	6
11.2	45	240	105	10.0	6
11.3	45	240	105	10.0	6
11.4	45	240	105	10.0	6
11.5	45	240	105	10.0	6
11.6	45	240	105	10.0	6
11.7	45	240	105	10.0	6
11.8	45	240	105	10.0	6
11.9	45	240	105	10.0	6
12.0	45	255	105	12.0	6
12.1	45	255	105	12.0	6
12.2	45	255	105	12.0	6
12.3	45	255	105	12.0	6
12.4	45	255	105	12.0	6
12.5	45	255	105	12.0	6
12.6	45	255	105	12.0	6
12.7	45	255	105	12.0	6
12.8	45	255	105	12.0	6
12.9	45	255	105	12.0	6
13.0	45	265	120	13.0	8
13.5	45	265	120	13.0	8
14.0	50	285	120	14.0	8
14.5	50	285	120	14.0	8
15.0	50	285	120	15.0	8
15.5	50	285	120	15.0	8
16.0	50	300	135	16.0	8
16.5	50	300	135	16.0	8
17.0	55	300	135	16.0	8

NEXT

ハイスリーマ

CRL チャッキングリーマ (ロング柄)

Chucking reamers with long shank

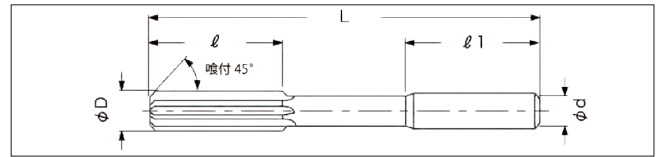

材質：HSS-Co

刃径	刃長	全長	柄長	柄径	刃数
D	ℓ	L	$\ell 1$	d	N
17.5	55	300	135	16.0	8
18.0	55	320	140	18.0	8
18.5	55	320	140	18.0	8
19.0	55	320	140	18.0	8
19.5	55	320	140	18.0	8
20.0	60	345	150	20.0	8

刃径	刃径公差
0.1m/m 寸法	m5
0.01m/m 寸法	+ 0.005 + 0

(0.01m/m 寸法)

刃径	刃長	全長	柄長	柄径	刃数
D	ℓ	L	$\ell 1$	d	d
2.95 ~ 2.99	35	165	75	3	6
3.01 ~ 3.09	35	165	75	3	6
3.95 ~ 3.99	35	165	75	4	6
4.01 ~ 4.09	35	165	75	4	6
4.95 ~ 4.99	35	180	75	5	6
5.01 ~ 5.09	35	180	75	5	6
5.95 ~ 5.99	35	195	90	6	6
6.01 ~ 6.09	35	195	90	6	6
6.95 ~ 6.99	35	205	90	7	6
7.01 ~ 7.09	35	205	90	7	6
7.95 ~ 7.99	40	225	105	8	6
8.01 ~ 8.09	40	225	105	8	6
8.95 ~ 8.99	40	225	105	9	6
9.01 ~ 9.09	40	225	105	9	6
9.95 ~ 9.99	40	240	105	10	6
10.01 ~ 10.09	40	240	105	10	6
10.95 ~ 10.99	45	240	105	10	6
11.01 ~ 11.09	45	240	105	10	6
11.95 ~ 11.99	45	255	105	12	6
12.01 ~ 12.09	45	255	105	12	6