


HLX ヘリックスリーマ

Helix reamers



直径 ϕ 1.0 ~ ϕ 1.5 以下の柄径 = ϕ 1.5
 直径 ϕ 1.6 ~ ϕ 1.9 以下の柄径 = ϕ 2.0
 直径 ϕ 2.0 ~ ϕ 2.9 以下の柄径 = ϕ 3.0

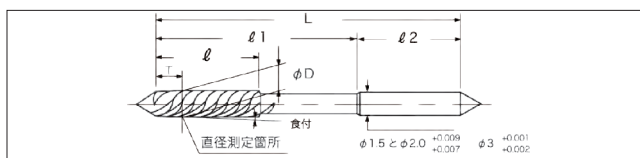

※直径 4.5mm 以下の形状

材質: HSS-Co

(0.1mm 寸法)

刃径	刃長	首下長	全長	喰付	柄長
D	l	l1	L	T	l2
1.0	10	20	40	2.5	20
1.1	10	20	40	2.5	20
1.2	10	20	40	2.5	20
1.3	10	20	40	2.5	20
1.4	10	20	40	2.5	20
1.5	10	20	40	2.5	20
1.6	10	25	50	3	25
1.7	10	25	50	3	25
1.8	10	25	50	3	25
1.9	10	25	50	3	25
2.0	13	35	60	3	25
2.1	13	35	60	3	25
2.2	13	35	60	3	25
2.3	15	35	60	3	25
2.4	15	35	60	3	25
2.5	15	35	60	3	25
2.6	20	35	60	4	25
2.7	20	35	60	4	25
2.8	20	35	60	4	25
2.9	20	35	60	4	25
3.0	20	45	70	4	25
3.1	20	45	70	4	25
3.2	20	45	70	4	25
3.3	20	45	70	4	25
3.4	20	45	70	4	25
3.5	20	45	70	4	25
3.6	22	45	75	5	30
3.7	22	45	75	5	30
3.8	22	45	75	5	30
3.9	22	45	75	5	30
4.0	22	45	75	5	30
4.1	25	50	80	6	30
4.2	25	50	80	6	30
4.3	25	50	80	6	30
4.4	25	50	80	6	30
4.5	25	50	80	6	30
4.6	25	55	85	6	30
4.7	25	55	85	6	30
4.8	25	55	85	6	30
4.9	25	55	85	6	30
5.0	25	55	85	6	30
5.1	25	55	90	6	35
5.2	25	55	90	6	35
5.3	25	55	90	6	35
5.4	25	55	90	6	35
5.5	25	55	90	6	35
5.6	30	65	100	7	35
5.7	30	65	100	7	35
5.8	30	65	100	7	35
5.9	30	65	100	7	35
6.0	30	65	100	7	35
6.1	30	65	100	7	35
6.2	30	65	100	7	35
6.3	30	65	100	7	35
6.4	30	65	100	7	35

刃径	刃長	首下長	全長	喰付	柄長
D	l	l1	L	T	l2
6.5	30	65	100	7	35
6.6	30	70	110	7	40
6.7	30	70	110	7	40
6.8	30	70	110	7	40
6.9	30	70	110	7	40
7.0	30	70	110	7	40
7.1	35	80	120	8	40
7.2	35	80	120	8	40
7.3	35	80	120	8	40
7.4	35	80	120	8	40
7.5	35	80	120	8	40
7.6	35	80	120	8	40
7.7	35	80	120	8	40
7.8	35	80	120	8	40
7.9	35	80	120	8	40
8.0	35	80	120	8	40
8.1	35	80	125	8	45
8.2	35	80	125	8	45
8.3	35	80	125	8	45
8.4	35	80	125	8	45
8.5	35	80	125	8	45
8.6	35	90	135	8	45
8.7	35	90	135	8	45
8.8	35	90	135	8	45
8.9	35	90	135	8	45
9.0	35	90	135	8	45
9.1	40	100	150	10	50
9.2	40	100	150	10	50
9.3	40	100	150	10	50
9.4	40	100	150	10	50
9.5	40	100	150	10	50
9.6	40	100	150	10	50
9.7	40	100	150	10	50
9.8	40	100	150	10	50
9.9	40	100	150	10	50
10.0	40	100	150	10	50
10.1	40	105	155	10	50
10.2	40	105	155	10	50
10.3	40	105	155	10	50
10.4	40	105	155	10	50
10.5	40	105	155	10	50
10.6	40	105	155	10	50
10.7	40	105	155	10	50
10.8	40	105	155	10	50
10.9	40	105	155	10	50
11.0	40	105	155	10	50
11.1	40	105	160	10	55
11.2	40	105	160	10	55
11.3	40	105	160	10	55
11.4	40	105	160	10	55
11.5	40	105	160	10	55
11.6	40	105	160	10	55
11.7	40	105	160	10	55
11.8	40	105	160	10	55
11.9	40	105	160	10	55


NEXT

ハイスリーマ

HLX

ヘリックスリーマ

Helix reamers

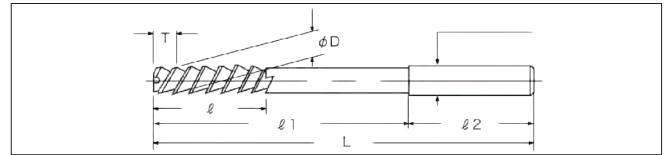

■材質：HSS-Co (0.1mm 寸法)

刃径	刃長	全長	柄長	喰付	柄長
D	ℓ	L	ℓ 1	T	ℓ 2
12.0	40	105	160	10	55
12.1	45	110	165	10	55
12.2	45	110	165	10	55
12.3	45	110	165	10	55
12.4	45	110	165	10	55
12.5	45	110	165	10	55
12.6	45	110	165	10	55
12.7	45	110	165	10	55
12.8	45	110	165	10	55
12.9	45	110	165	10	55
13.0	45	110	165	10	55
13.1	45	110	170	10	60
13.2	45	110	170	10	60
13.3	45	110	170	10	60
13.4	45	110	170	10	60
13.5	45	110	170	10	60
13.6	45	110	170	10	60
13.7	45	110	170	10	60
13.8	45	110	170	10	60
13.9	45	110	170	10	60
14.0	45	110	170	10	60