


CB 沈めフライス (六角穴付ボルト用) S

Counterbores for capscrew

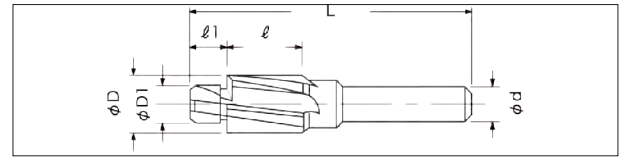


■材質：HSS

呼称	刃外径		案内径		刃長 l	案内長 l_1	全長 L	柄径 d
	D	公差	d 1	公差				
3.0	6.5	+ 0.20 0	3.2	0 -0.05	6.5	3.5	40	6.0
3.5	6.5		3.7		6.5	3.5	40	6.0
4.0	8.0		4.3		10.0	5.0	50	6.0
4.5	8.5		4.8		10.0	5.0	50	8.0
5.0	9.5		5.3		12.0	5.0	55	8.0
6.0	11.0		6.4		14.0	6.0	60	8.0
8.0	14.0		8.4		16.0	7.0	65	12.0
10.0	17.5		10.5		18.0	8.0	70	12.0
12.0	20.0		13.0		18.0	10.0	80	12.0
14.0	23.0		15.0		20.0	12.0	85	12.0
1/4	11.0	+ 0.20 0	6.6	0 -0.05	14.0	6.0	60	8.0
5/16	14.0		8.3		16.0	7.0	65	12.0
3/8	15.0		9.8		18.0	8.0	70	12.0
1/2	20.0		13.2		18.0	10.0	80	12.0

ハイスザグリ

CBT 沈めフライス (六角穴付ボルト用) MT

Counterbores for capscrew with MT shank

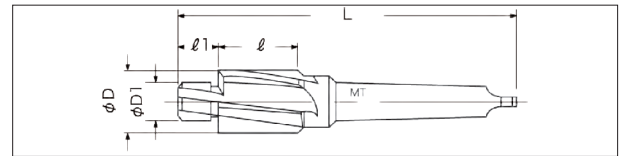

■材質：HSS

呼称	刃外径		案内径		刃長 l	案内長 l_1	全長 L	柄径 d		
	D	公差	d 1	公差						
10.0	17.5	+ 0.20 0	10.5	0 -0.05	16.0	10.0	101.5	MT1		
12.0	20.0		13.0		18.0	12.0	106.5	MT1		
14.0	23.0		15.0		20.0	12.0	110.5	MT1		
16.0	26.0		17.0		22.0	15.0	130.5	MT2		
18.0	29.0		19.0		24.0	17.0	134.5	MT2		
20.0	32.0		21.0		26.0	20.0	138.5	MT2		
22.0	35.0		23.0		28.0	21.0	142.5	MT2		
24.0	39.0		25.0		32.0	21.0	170	MT3		
3/8	15.0		+ 0.20 0		9.8	0 -0.05	16.0	10.0	102.5	MT1
1/2	20.0				13.2		18.0	12.0	106.5	MT1
5/8	26.0	16.5		22.0	15.0		128.5	MT2		
3/4	29.0	20.0		26.0	18.0		135.5	MT2		
7/8	32.0	23.0		28.0	21.0		140.5	MT2		
1"	37.0	26.5		32.0	22.0		169	MT3		