


# OCB 沈めフライス (押し出しピン用)

Counterbores for ejector-pin

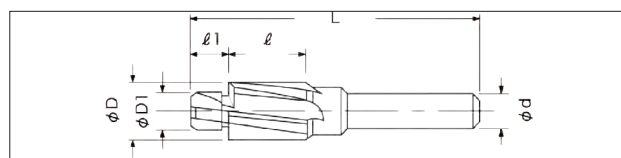


材質：HSS-Co

呼称	刃外径		案内径		刃長 ℓ	案内長 ℓ1	全長 L	柄径 d
	D	公差	d1	公差				
2.0	6.0	+ 0.20 0	2.0	0 -0.05	7.0	3.0	36	5.0
2.5	6.0		2.5		7.0	3.0	36	5.0
3.0	6.0		3.0		7.0	3.0	37	5.0
3.5	8.0		3.5		8.0	3.0	42	6.0
4.0	8.0		4.0		8.0	4.0	43	6.0
4.5	9.0		4.5		8.0	4.0	45	6.0
5.0	9.0		5.0		10.0	5.0	51	6.0
6.0	10.0		6.0		10.0	5.0	55	8.0
7.0	11.0		7.0		10.0	6.0	55	8.0
8.0	13.0		8.0		12.0	8.0	64	10.0
9.0	14.0		9.0		12.0	8.0	64	10.0
10.0	15.0		10.0		12.0	10.0	66	10.0
12.0	17.0		12.0		14.0	10.0	69	12.0
14.0	19.0		14.0		14.0	12.0	76	12.0
16.0	21.0		16.0		16.0	13.0	79	12.0

ハイスザグリ

# SCB 沈めフライス (皿小ネジ用)

Counterbores 90° capscrew

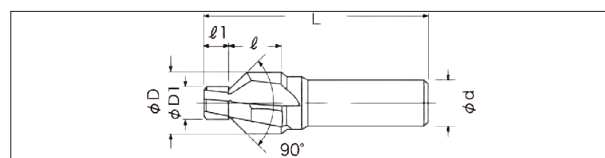

材質：HSS

呼称	刃外径		案内径		刃長 ℓ	案内長 ℓ1	全長 L	柄径 d
	D	公差	d1	公差				
3	6.4	+ 0.02 0	3.2	0 -0.05	6.5	3.5	40	6.0
4	8.4		4.3		8.0	4.5	50	6.0
5	10.4		5.3		11.0	5.0	55	8.0
6	12.5		6.4		12.0	6.0	60	10.0
8	16.5		8.4		16.0	7.0	65	12.0